

IP65 LED Utility Eyelid Bulkhead



AVAILABLE FINISHES




COLOUR TEMPERATURE



CODE	DESCRIPTION
OV9505WH9	10W Bulkhead - White
OV9505WH93EM	12W Bulkhead With Emergency - White

	PRODUCT INFO	
	Mains	Emergency
Wattage	10W	12W
Lumens	543lm	543lm
Lumens (Emergency)	N/A	141lm
Efficacy	54lm/W	45lm/W
CCT (K)	4200K	
CRI	68.4	
Beam Angle	120°	
LED Lifetime	50,000 Hours	
Voltage	230V ~	
Frequency	50/60Hz	
Operating Temp	-5°C - +45°C	

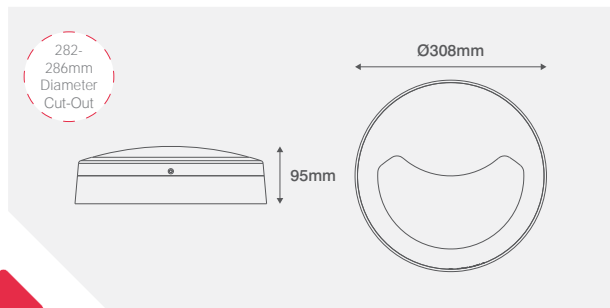

Complete with prewired Flow™ Connector

PRODUCT APPROVALS

10W: EN 60598-1 EN 60598-2-1 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 55015 EN 61000-3-2 EN 61000-3-3
12W: EN 60598-1 EN 60598-2-22 EN 60598-2-1 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 55015 EN 61000-3-2 EN 61000-3-3



IP65 LED Utility Eyelid Bulkhead With Corridor Function

AVAILABLE FINISHES




COLOUR TEMPERATURE



	PRODUCT INFO	
	Mains	Emergency
Wattage	13W	18W
Lumens	543lm	607lm
Lumens (Corridor)	100lm	130lm
Lumens (Emergency)	N/A	141lm
Efficacy	42lm/W	33lm/W
CCT (K)	4200K	
CRI	68.4	
Beam Angle	120°	
LED Lifetime	50,000 Hours	
Voltage	230V ~	
Frequency	50/60Hz	
Corridor Function	Yes	
Operating Temp	-5°C - +45°C	

CODE	DESCRIPTION
OV9505WH9MS	13W Bulkhead With Microwave - White
OV9505WH9MS3EM	18W Bulkhead With Microwave & Emergency - White

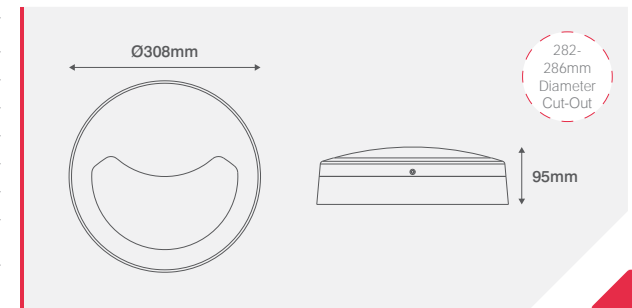

PRODUCT APPROVALS

Complete with prewired Flow™ Connector

13W: EN 60598-1 EN 60598-2-1 EN 55015 EN 61547: 2009 EN 61000-3-2 EN 61000-3-3 EN 61347-1 EN 61347-2-13 EN 61347-2-7
18W: EN 60598-1 EN 61347-2-7 EN 60598-2-22 EN 60598-2-1 EN 55015 EN 61547 EN 61000-3-2 EN 61000-3-3 EN 61347-1 EN 61347-2-13

